HYBRID STEPPING MOTOR 17HS1006-C09

REV	A

General specification		Electrical specification	
Step angle	1.8° ±5%	Rated voltage	Bipolar 5.4V Unpolar 4V
Number of phase	2	Rated current	Bipolar 0.67A Unpolar 0.95A
Insulation resistance	100MΩmin. (500V DC)	Resistance per phase	Bipolar 8.4Ω±10% Unpolar 4.2Ω±10%
Insulation class	Class B	Inductance per phase	Bipolar 10mH±20% Unpolar 2.5mH±20%
Rotor inertia	38g.cm²	Holding torque	0.55N.m
Mass	0.38kg	Gear ratio	1 :9

Wiring diagram



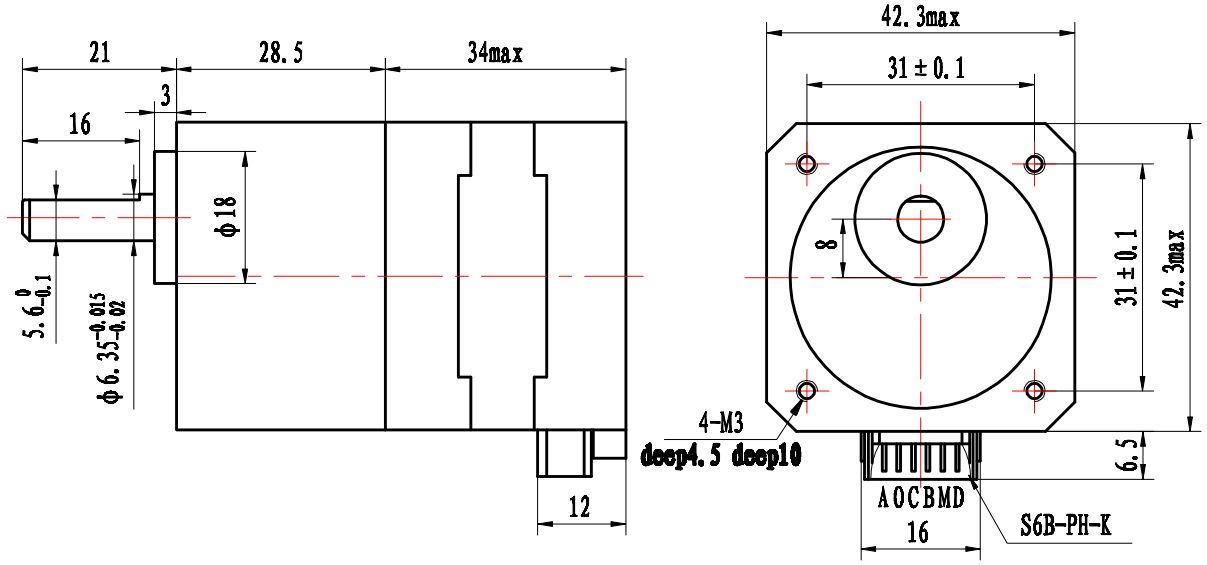

17HS1006-C09

标记	处数	更改文件号	签字	日期

设计		标准化	
		批准	
审核			
工艺		日期	2011.10.27

图样标记	重量	比例
共 1 张	第 1 张	

格特威
NINGBO GETWELL MOTOR CO.,LTD

17HS1006-C09型步进电机
规格书

GTW3.162.XXX